



# OPTONICA

## DATASHEET

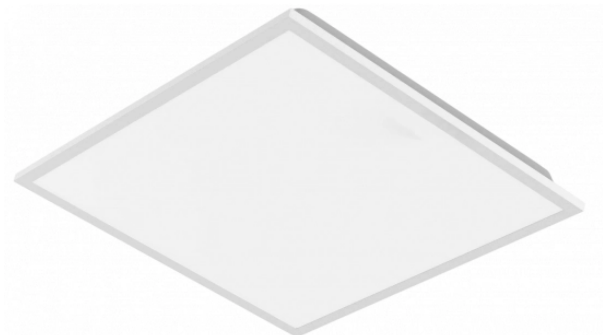

### LED Backlit Panel 60x60 4000K CRI>80 - STARSENSE DRIVER

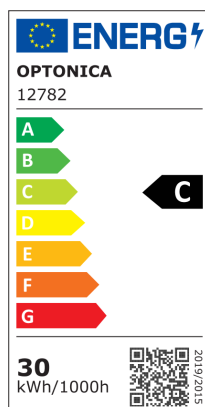

#### Power

30W

#### Light color

Neutral white

#### Stamps



RoHS



-80



## Technical Specification

|                              |               |                                          |               |
|------------------------------|---------------|------------------------------------------|---------------|
| Brand                        | Optonica      | On/Off Cycles                            | 25 000x       |
| Product Code                 | DL30-A3       | Instant On                               | 0.1s          |
| Power                        | 30W           | Material                                 | Aluminium     |
| Energy Consumption           | 30 kWh/1000h  | Operating Frequency                      | 50-60 Hz      |
| Input voltage                | AC220-240V    | Temperature                              | -20°C / +40°C |
| Flux                         | 4200 lm       | Ra ≥                                     | 80            |
| FLUX per watt                | 140 lm/W      | Life span                                | 25 000 Hours  |
| IP                           | 20            | Lumen maintenance at end of service life | 70%           |
| Correlated Color Temperature | 4000K         | Size of product                          | 595x595x33 mm |
| Light Color                  | Neutral white | Size of package                          | 610x370x635mm |
| EAN Code                     | 3801057127828 | Items per pack                           | 10            |
| Energy Efficiency Label      | C             | Warranty                                 | 3 Years       |
| Beam angle                   | 120°          |                                          |               |